

# sPPC-2200



### Features

- 21.5" Full HD display
- DirectX® 10.1 & OpenGL 2.0 support
- Slim design (40mm thick)
- Removable 2.5" SATA HDD tray
- Optional I/O protection cover
- Optional Touch CCD for interactive function (for OEM/ODM)

### Specifications

System Mainboard	IB889-22
CPU Type	AMD Turion™ II Neo N54H processor on board (2.2GHz)
System Speed	2.2GHz
Memory	2x DDR3 1066MHz SO-DIMM, Max. 4GB
Graphicprocessor	AMD 785E built-in Radeon HD4200 graphics
Construction	Steel (SGCC)
Chassis	Black
Extension I/O	1x DVI-I, 2x Gigabit LAN, 4x USB
HDD Expansion	Removable 2.5" SATA HDD tray
Power Supply	60W adaptor
Speaker	2x 10W 8ohm speakers
Mounting	VESA mount, 100mm x100mm
Dimensions	540mm x 296mm x 40mm

### Display


LCD Size	21.5" TFT LCD
LCD Color	16.7M colors
Backlight	LED
DisplayResolution	1920x1080 16:9 Full HD
LCD Brightness	250 cd/cm2
DotPitch	248.25 um x 248.25 um
ViewingAngle	170/160
Backlight MTBF	30,000 hrs

### Environmental

Operating Temperature	0°C ~ 45°C (32°F ~ 113°F)
Storage Temperature	-20° ~ 80°C
Relative Humidity	5~90% @ 45°C, (non-condensing)

### Ordering Information

sPPC-2200	21.5" Panel PC with 2.2GHz AMD Turion™ II Neo N54L CPU, 2GB DDR3 SO-DIMM, 60W power adaptor
sPPC-2200/IOC	sPPC-2200 IO protection cover

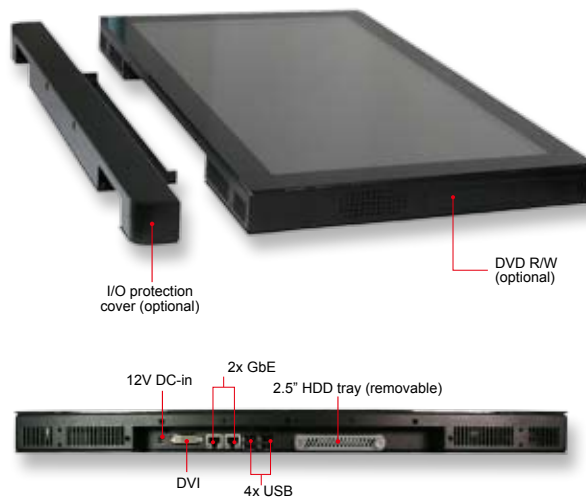

Remarks: 1. ODM/OEM is available  
2. Specifications are subject to change without prior notice.

- 1 Motherboards
- 2 Disk-Size SBGs
- 3 CPU Modules
- 4 PC/I/O4 Plus
- 5 CPU Card
- 6 Embedded Systems
- 7 Network Security Appliance